



## LIGHTNING VALVE COVERS

## 3901

FITS: '01-UP GL1800

PART#	INCLUDED
603901LU	1 Left Upper Cover
603901LL	1 Left Lower Cover
603901RU	1 Right Upper Cover
603901RL	1 Right Lower Cover
401208	4 Alcohol Pads
303901	1 Instruction Sheet

### NOTE

Our Lightning Valve Covers are stunning chrome die-cast covers designed to shroud the existing valve covers. The design of the lower Lightning Covers allows them to be removed as a unit with the stock covers for easy access to the spark plugs. Removal of the stock upper valve covers requires the upper Lightning Covers be removed to allow access to the fasteners. When prying the Lightning covers free, care must be taken to avoid damaging both the lightning covers and the stock covers beneath. Contact us at toll free (866) 277-9598 to purchase replacement adhesive pads should the covers need to be removed and replaced.

### PROCEDURE AVERAGE TIME: 15-30 MINUTES

**STEP 1** Place the bike on its center stand.

**STEP 2** Using the alcohol pads provided, thoroughly clean the outer surface of the stock valve covers. Wipe the surface clean with a clean cloth.

**STEP 3** Identify each Lightning Valve Cover and note its proper location for installation on the motorcycle.



**STEP 4** Select one of the four Lightning Valve Covers. Without removing the backing from the adhesive pads, test fit the cover. If necessary, temporarily remove any accessories (highway pegs, etc.) that inhibit installation.

**STEP 5** Rub each pad firmly with your fingernail **BEFORE** removing the backing to activate the adhesive contained in the foam core of the pad. Once you have activated all pads, remove the backing from each and maneuver the cover into position. Hold it firmly in place for 30 seconds to ensure a good initial bond.

**STEP 6** Repeat STEP 4 and STEP 5 for the remaining three Lightning Valve Covers.

**STEP 7** Replace any accessories that may have been removed in STEP 4.

-cont.-

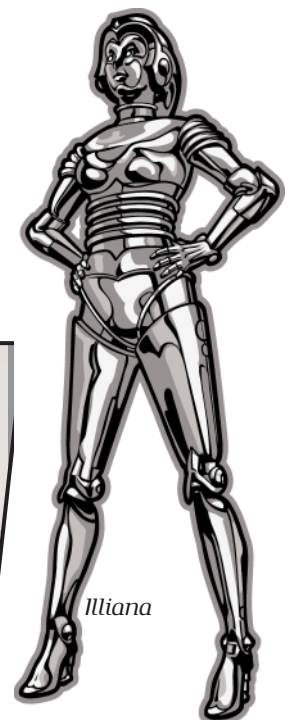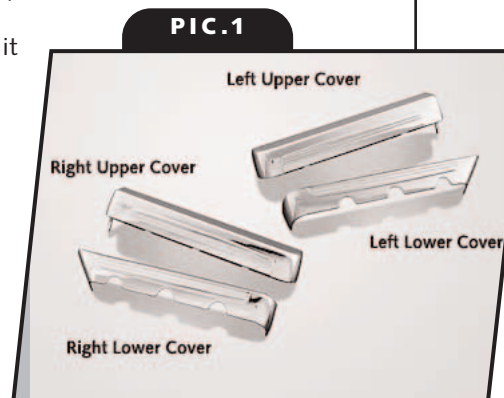

### E-MAIL

techsupport@kuryakyn.com  
or call 715.247.2983

### WARRANTY

Kuryakyn™ warrants that any Kuryakyn product sold hereunder, if properly installed, maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of one (1) year from the date the Kuryakyn products are sold to the customer.

**CONSEQUENTIAL DAMAGES:**  
Kuryakyn shall not be liable for any consequential or incidental damages.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today--select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2003 Kuryakyn USA™ All Rights reserved.

**STEP 8** Start the bike and allow it to run until it reaches normal operating temperature. After five minutes at normal operating temperature, turn the bike off and allow it to sit over-night (10-12 hours).

**Kuryakyn™**

*Ride On!*

PAGE

**2**