



**MOUNTING INSTRUCTIONS FOR**  
**Part 45-1245**  
**GL1800 2018+ Mirror Lights w/DRL &**  
**Sequential Turn Signal**

Read instructions thoroughly before installing. There are several YouTube video's of this procedure.

Note: Recommended that these lights be installed by a qualified mechanic to prevent damage to the lights and motorcycle.

1. Remove 5mm allen screw and arm panel shown in figure 1.
2. Remove mirror assembly by removing the two support bolts as shown in figure 2.
3. Disconnect electrical connection.
4. Remove rearview mirror glass by pulling out on bottom of the mirror glass to release lower tabs. After lower tabs have been released, push up on the bottom of the mirror glass to release upper tabs. Figure 3.
5. Remove two 4mm tapping screws and trim clip, remove mirror panel. Remove three 5mm tapping screws to release turn signal assembly and mirror cover. Remove OEM turn signal assembly. Figure 3.
6. Install in reverse order with new turn signal assembly, replacing OEM part.

Figure 1

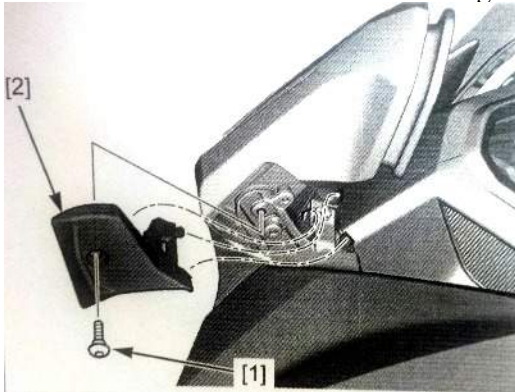


Figure 2

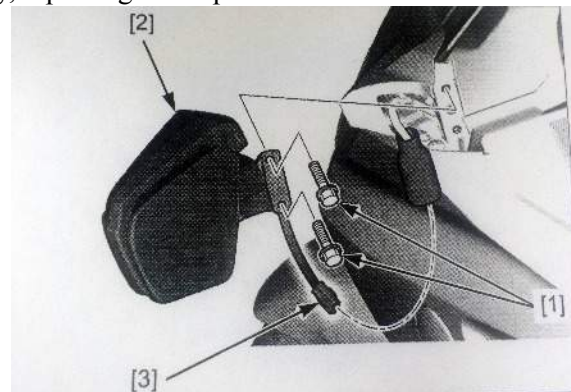


Figure 3

