

INSTALLATION INSTRUCTIONS

DRIVER BACKREST FOR GOLD WING

6772

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:


1	Backrest	1	Hardware Kit, containing:
1	Bracket	4	1/4-20 X 5/8" Socket Head Cap Screws
1	Seat Hole Plug	4	1/4-20 x 1/4" T-Nut
		1	Spring Plunger
		1	Thumb Screw

YOU WILL ALSO NEED:

Hex wrench set, flat blade screw driver, painters masking tape, loctite

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.
- STEP 2** Remove side covers and unfasten the seat. Disconnect the seat's electrical harness from the motorcycle. Remove the existing seat. Place it on a flat clean surface.
- Note: See motorcycle's service manual for additional assistance.*
- STEP 3** On the bottom side of the seat, unfasten and remove existing seat hole plug. Set it aside, it will **NOT** be reused.
- STEP 4** Located provided Bracket, four (4) T-Nuts, and four (4) Socket Head Cap Screws. Apply a small amount of loctite to each of the screws.
- STEP 5** Refer to PIC 2. Carefully align and slide the four (4) T-Nuts over the mounting holes located around the opening of the seat hole. Be sure the T-nuts are flat side down. Place a small amount of tape over an edge of the aligned T-Nuts to hold them in place. Do not cover the mounting holes of the T-Nuts.
- STEP 6** Refer to PIC 3. Align the mounting plate of the bracket with the T-Nuts. Insert the bracket through the seat hole and press down on it firmly. The bracket will be a tight fit.
- STEP 7** Refer to PIC 4. Secure the bracket in place using the provided four (4) Socket Head Cap Screw. Fully tighten hardware. Be careful not to let the T-Nuts rotate as you tighten the screws.

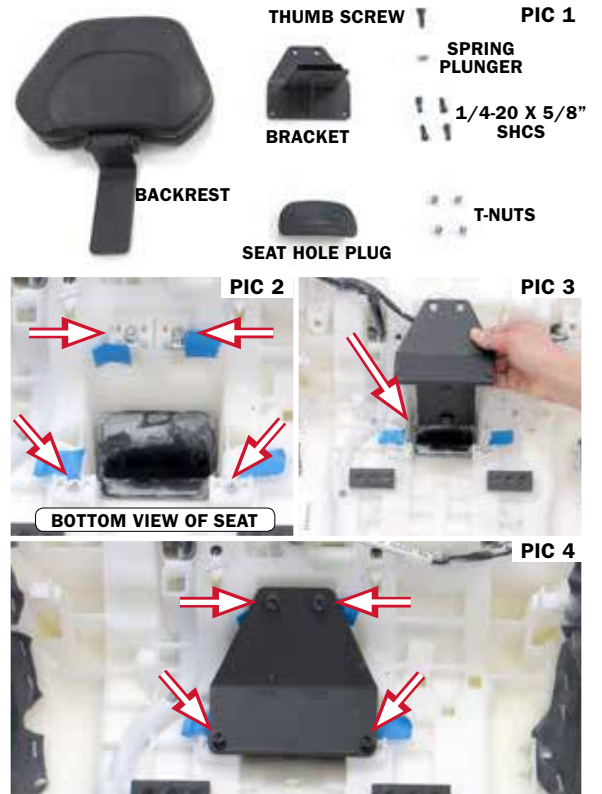

KURYAKYN.COM

INSTALLATION INSTRUCTIONS

DRIVER BACKREST FOR GOLD WING

6772

-CONTINUED-

STEP 8 Reconnect the seat's electrical harness to the motorcycle and reinstall the seat. Reinstall the side covers once the seat is fully installed.

STEP 9 Refer to PIC 5. Locate provided Spring Plunger. From the top side of the seat, press back and down on the hole located in between the drive and passenger seat to gain easy access to the bracket. Insert and fasten the Spring Plunger into the mounting hole of the Bracket.

Note: Over tightening of the Spring Plunger will cause difficulty with moving the seat up and down.

STEP 10 Located provided Backrest and test first it into the Bracket. Adjust the Spring Plunger as needed.

STEP 11 Refer to PIC 6. Locate provided Seat Hole Plug. Set it into the seat, covering the backrest Bracket.

STEP 12 Refer to PIC 7. Locate provided Backrest. Insert the Backrest through the Seat Plug and into the Bracket. The Backrest should click into place once inserted into the Bracket. Adjust the height of the Backrest by pushing it down or pulling it up.

STEP 13 Refer to PIC 8. Locate provided Thumb Screw and apply a small amount of loctite to it. On the backside of the Backrest insert the Thumb Screw into the mounting hole.

STEP 14 Adjust the angle of the Backrest by tightening or loosening the Thumb Screw.

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



PIC 5



PIC 6



PIC 7



PIC 8



FINAL

INSTALLATION INSTRUCTIONS

DRIVER BACKREST FOR GOLD WING

6772

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice